

# CHD



SSL High Flow



SSL High Power

## CHAIN TRENCHERS


CHD 90 | CHD 120 | CHD 150

### FOR SKID STEER LOADER

CHD chain trenchers are designed for set-section trenching on natural soils. The discharge screw on the right-hand side and the trench clearing device make sure the trench is kept clean.

### WATCH THE VIDEO

Scan the QR code using your smartphone

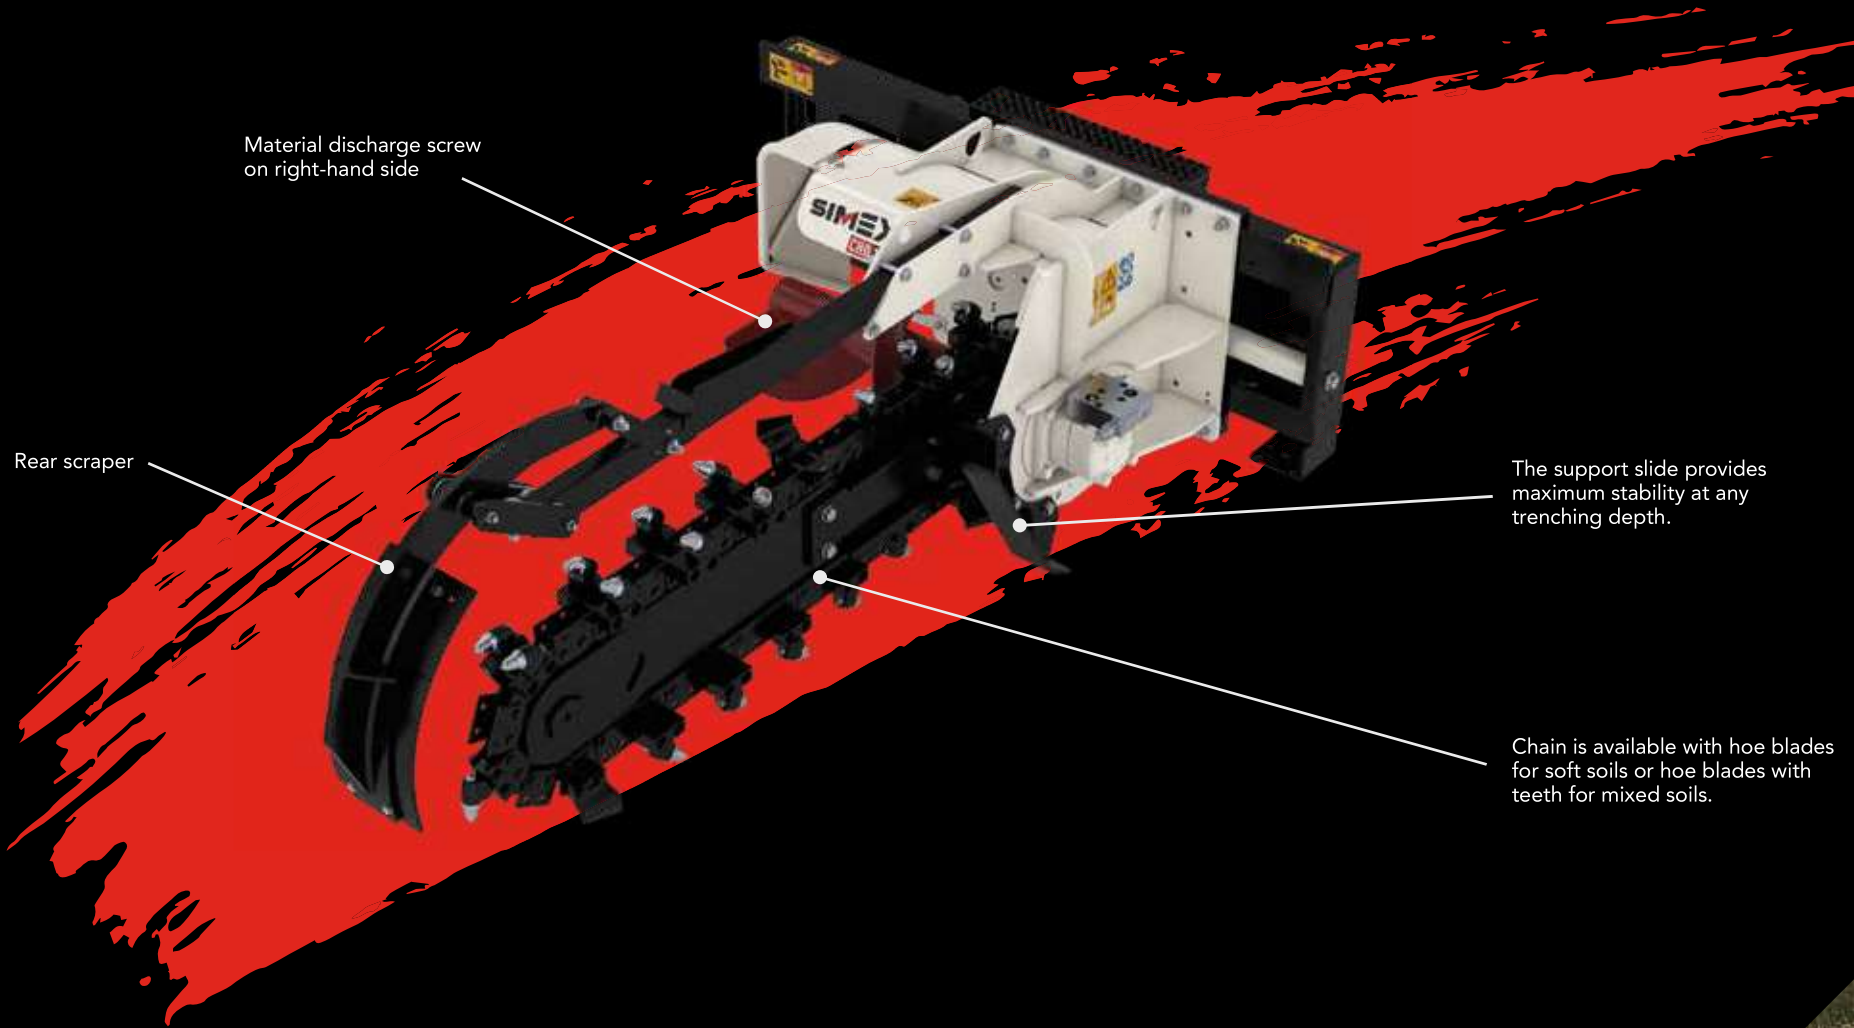

Material discharge screw on right-hand side

Rear scraper

The support slide provides maximum stability at any trenching depth.

Chain is available with hoe blades for soft soils or hoe blades with teeth for mixed soils.

Scan the QR code using your smartphone



			FOR SOFT SOILS		FOR MIXED SOILS		
TECHNICAL DATA			CHD 90S	CHD 120S	CHD 90	CHD 120	CHD 150
Maximum trench depth	<b>A</b>	mm inch	900 35	1200 47	900 35	1200 47	1500 59
Standard trench width		mm inch	150 6	150 6	150 6	150 6	150 6
Optional trench width		mm inch	100 - 200 4 - 8	100 - 200 4 - 8	200 - 250 8 - 10	200 - 250 8 - 10	200 8
Side shift			free		free - hydraulic (optional)		
Scraper			Mechanical with spring		Mechanical with spring		
Operating weight (1)		kg lbs	280 617	425 936	715 1575	780 1715	830 1830
Required oil flow		l/min gmp	35 - 95 9 - 25	60 - 115 16 - 30	60 - 120 16 - 32	70 - 140 18 - 37	90 - 160 24 - 42
Maximum oil pressure		BAR psi	240 3500	240 3500	250 3625	250 3625	250 3625

(1) The installer is responsible for ensuring that the equipment meets the prime mover's specifications and weight requirement. Simex does not accept responsibility or liability for the information provided. Technical modifications may vary without prior notice.

